INTRODUCTION

Building Materials

Al Kuwaiti Building Materials Division is a dedicated building material trading division specializing in quality Woods, Sanitaryware, supply & installation of Steel Doors & Roller Shutters, Fire Products, Paints, concrete, steel Bars, Plumbing & Electrical Products. The Division caters to the needs of construction industry across Bahrain. The Building Materials Division has been a leading player in the Bahrain market since many years and represent quality brands from across the world, catering to diverse market segments. The Division also provides end-to-end solutions and technical assistance for all its products.

1



TABLE OF CONTENTS

CONTENTS

Woods / Plywoods 3-5 Allied Products / Aluminium Sheet 6-7 Structural Steel / Pipes & Angles 8-9 General Hardware / Tools Equipment 10-11 Concrete Blocks / Equipment & Accessories 12-13 Equipment 14-16 2



WOODS

White Wood



Grade: Merchantable Thickness: 1", 2", 3", 4" Width: 2", 3", 4", 6", 8", 10", 12" Length: 13'

Red Meranti Wood



Grade: Merchantable Thickness: 2", 3", 4" Width: 4" - 12" Length: 8' - 24'

Red Wood



Grade: Merchantable Thickness: 2", 3" Width: 3", 4" Length: 10', 12', 15', 20'

Ash Wood



Grade: Kiln dried Thickness: 2" Width: Assorted Length: Assorted

Beech Wood



Grade: Kiln dried Thickness: 2" Width: Assorted Length: Assorted Applications and uses: Wood is used for doors and door frames, Commercial Building wooden application, framing, molding balustrades and support structures and furniture High class interior

Maple



Thickness: 2" & 3" Width: 5" and above. Random Length: 8' and above. Random



Thickness: 2" Width: 6" and above. Random Length: 8' and above. Random

3

Mahogany



Thickness: 2" Width: 6" and above. Random Length: 8' and above. Random



PLYWOODS

Oak Wood



Thickness: 2" Width: 5" and above. Random Length: 8' and above. Random

Teak Wood



Thickness: 2" Width: 5" and above. Random Length: 8' and above. Random

Walnut Wood




Thickness: 2" Width: 5" and above. Random Length: 8' and above. Random

Commercial Plywood



Grade: DBB / CC (MR Glue) JPIC Standard Thickness: 4, 6, 9, 12, 15, 18, 25 mm Width: 4' Length: 8' and 3' x 7' x 4mm

Marine Plywood



Grade: BS 1088 WBP Glue / Marine Grade Thickness: 4, 6, 9, 12, 18, 25mm Width: 4' Length: 8'

Film Faced Plywood



Grade: JPIC Standard Thickness: 12 mm & 18 mm Width: 4' Length: 8'

WBP Plywood




Grade: BB / CC Grade WBP Glue Thickness: 4, 6, 9, 12, 18 mm Width: 4' Length: 8'

Birch Plywood



Grade: BB / WG WBP Glue Thickness: 4, 6, 9, 12, 18 mm Width: 4' Length: 8'

Birch Plywood



PLANK 2"X 10"X 6' - 9' - 12'

Plywoods are used for wooden framing, shuttering and cladding. It may be and cladding. It may be used for wall paneling, flooring and furniture.





Applications and uses:

PLYWOODS

Decorative Plywood



Grade: Beech / Teak with groove Thickness: 4 mm Width: 4' Length: 8'

White PVC Plywood




Grade: White PVC Plywood Thickness: 3.6 mm Width: 4' Length: 8'

Plain MDF




Grade: Medium Density Fiberboard Thickness: 4, 6, 9, 12, 15,18, 25 mm Width: 4' Length: 8'

Melamine MDF



Grade: Medium Density Fiberboard with melamine pressed Density: 720-750kg / Colours-Plain and Wooden Colours Thickness: 3, 6, 12 and 18 mm Width: 4' Length: 8'

Veneered MDF



Grade: Medium Density Fiberboard with Veneered Beach / Mahogany / Ash / Maple / Teak Thickness: 4, 12 mm, 18 mm Width: 4' Length: 8'


Applications and uses: Melamine MDF, Veneered MDF, Plain MDF and Decorative boards and plywoods are used for interior decorations, wardrobes, kitchen cabinet and others.

Ivory Faced Softboard



Grade: Ivory Faced Thickness: 12 mm Width: 4' Length: 8'

Laminates



Grade: Assorted Colors Matt / Glossy Thickness: 0.5, 0.8 mm Width: 4' Length: 8'

5

Parquet Flooring



Types: Laminated Flooring Engineered Flooring Solid Wood Flooring (of all exotic wood species)



ALLIED PRODUCTS

Flexcell Bituminous Sheets



Grade: BS 1142 : 1989 Board Thickness: 12, 18 mm Width: 4' Length: 7'. 8'

Applications and uses: Flexcell Bituminous are used as general purpose expansion joint filler in concrete slab and wall construction and as protection board for waterproofing membranes.

ALLIED PRODUCTS

Gypsum Ceiling Tiles




Sizes: 600mm x 600mm x 9mm Also Available: Aluminium & Mineral Fiber tiles.




Range: Regular, MR & FR Thickness: 12mm


Gypsum Board & Accessories



Length: 4 feet * 8 feet Brands: All major brands

Acrylic Sheet






Thickness: 3,4 & 6mm Length: 4' * 8' & 4'*6' Colour: Clear & White



Poly Carbonate Sheets





Range: 1.7mm & 2mm Size: 2*3mtr Grade: Clear, Bronze, Green & Blue



Manhole Covers



Grade: BS-497-76, Single Seal & Double Seal Size: Assorted Spec: Cast Iron

ALUMINIUM SHEETS

We are pleased to introduce our Structural Steel Division and product range Guide along with the general specifications of the product. This is to assist you with your current and future specification related requirements. We cater to the top Engineering and Construction firms based in the region as a one stop shop for all the requirements.


We continuously strive to ensure that our customers are receiving the best service in terms of quality price and delivery.

Aluminium Plain Sheet




Range: 0.4mm to 6mm Grade: A1050/H14, AA 1100/H14 JIS G 3302 SGCC/A653

Aluminium Chequered Sheets



Thickness: 2mm to 6mm Length: 4' * 8' & 4'*6' Grade: AA1100/F







Size: Standard/Custom Grade: ASTM A36/ ASTM A572


MS Plain & Chequered

Sheets





Type: GI & Aluminium Size: 28G, 26G,24G & 22G Length: Custom made



Range: 10gauge to 28 gauge Size: 4'*8' Grade: ASTM A653





Range: 2mm to 50mm (Plain Sheet) 2mm to 10 mm (Chequered sheet) Grade: As per ASTM A36/ JIS G 3302 SGCC/ A653, S275JR Size: 4'*8', 2*6mtr, 1.5*6mtr.



STRUCTURE STEEL







Size:

Universal Beam-127*76 series to 762*267 series Universal Coloms- 152*152 series to 406*140 series HEA/HEB Section- 100 series to 700 series IPE Section- 100*75 to 550*210 series JIS I Section- 100*50 series to 500*100 series JIS H Section - 100 series to 400 series Grade: BSEN 10025 S235JR/10025 S275JR/ ASTM A36/SS400/Q235B Length: 6 mtr & 12 mtr




MS Channels

JIS Channels Size: 75*40 series to 300*100 series with various wall thickness Grade: As per JIS G3101-SS400/ASTM A36/EN 10025 S275JR Length: 6 mtr & 12 mtr

UPN Channels Size: UPN 80 series to UPN 400 series Grade: As per ASTM A36/ EN 10025S275JR Length: 6 mtr & 12 mtr










Range: CHS Size: ½" to 8" Grade: As per BS 1387/1985, Grade A & Grade B, & ASTM A-105 etc. Length: 6 mtr



8



Welded / BRC Mesh

Size: 4' * 8' & 8' * 16' in different thickness Grade: BS 4449-2005/BS 4483-2005 & DIN 488



PIPES AND ANGLES





Range: MS, GI & Seamless Grade: ASTM/ A1050/H14, BS 1387 End Type: Plain & Socket (Threaded)

Reinforcing Steel Bar





Size: 8mm to 32mm Grade: As per BS & ASTM standards Length12 mtr

MS Flat Bars





Size: 12mm*3mm to 150mm *12mm Specification: JIS G3101-SS400/ ASTM A36/EN 10025 S275JR




MS Shaft & Square Bars

MS Angles



Size:

MS Square Bars: 8mm to 100mm MS Shafting Bars: 6mm to 80mm MS Round Bars: 6mm to 80mm Specification: JIS G3101-SS400 & JIS G3123-SS41



Equal Angles Size: 25*25*2.5mm to 200*200*20mm Grade: As per JIS G3101-SS400/ASTM A36/EN 10025 S275JR Length: 6 mtr

9

Unequal Angles Size: 60*40*5mm to 200*100*10mm Grade: As per JIS G3101-SS400/ASTM A36/EN 10025 S275JR Length: 6 mtr




GENERAL HARDWARE



TOOLS EQUIPMENT



CONCRETE BLOCKS

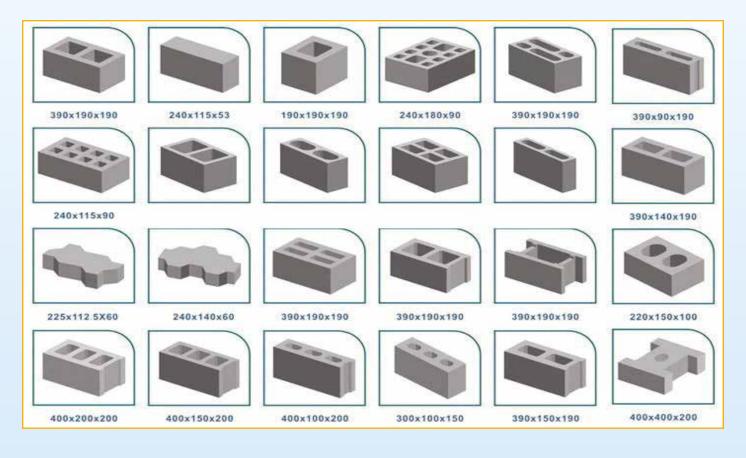







EQUIPMENT AND ACCESSORIES



13









GNE FOR ALL 40V AKKU POWER

Bireer alla